


PLANT LIST				
	COMMON NAME	LATIN NAME	QNTY	SIZE
TREES	OCTOBER GLORY RED MAPLE	ACER RUBRUM 'OCTOBER GLORY'	14	4" CAL.
	EASTERN RED CEDAR	JUNIPERUS VIRGINIANA	10	6-7
	NORWAY SPRUCE	PICEA ABIES	2	7-8"
	WHITE FIR	ABIES CONCOLOR	3	7-8"
SHRUBS	BAR HARBOR JUNIPER	JUNIPERUS HORIZONTALIS 'BAR HARBOR'	18	3 GAL.
	ENDLESS SUMMER HYDRANGEA	HYDRANGEA MACROPHYLLA 'ENDLESS SUMMER'	23	7 GAL.
PERENNIALS	STELLA D ORO DAYLILY	HEMEROCALLIS 'STELLA D ORO'	12	1 GAL.
TREES	RED MAPLE	ACER RUBRUM	6	6-8"
SHRUBS	VIBURNUM	VIBURNUM DENTATUM	16	24"
	NORTHERN BAYBERRY	MYRICA PENNSYLVANICA	7	24"
	LOWBUSH BLUEBERRY	VACCINIUM ANGSTIFOLIUM	25	24"
GROUND COVER	NE CONSERVATION/WILDLIFE MIX			TBD
RAINGARDEN				
TREES	SERVICEBERRY	AMELANCHIER CANADENSIS	6	6-8"
SHRUBS	WINTERBERRY	ILEX VERTICILLATA	10	24"
	REDTWIG DOGWOOD	CORNUS SERICEA	7	24"
PERENNIALS	IRIS	IRIS VERSICOLOR	14	1 GAL.

PLANTING NOTES

- LANDSCAPE CONTRACTOR SHALL VISIT SITE PRIOR TO SUBMITTING BID TO BECOME COMPLETELY FAMILIAR WITH SITE CONDITIONS.
- NO PLANTING WILL BE INSTALLED UNTIL ALL GRADING AND CONSTRUCTION HAS BEEN COMPLETED IN THE IMMEDIATE AREA.
- CONTRACTOR TO VERIFY ALL UTILITIES ON PROPERTY AND TO PROTECT ALL UTILITIES DURING EXCAVATION.
- IF THERE IS A DISCREPANCY BETWEEN THE NUMBER OF PLANTS SHOWN ON THE PLAN AND THE NUMBER OF PLANTS SHOWN IN THE PLANT LIST, THE NUMBER OF PLANTS SHOWN ON THE LIST WILL TAKE PRECEDENCE.
- ALL CONTAINER MATERIAL TO BE GROWN IN CONTAINER A MINIMUM OF SIX MONTHS.
- ALL MATERIAL SHALL COMPLY WITH THE LATEST EDITION OF THE AMERICAN STANDARD FOR NURSERY STOCK, ACCORDING TO THE AMERICAN ASSOCIATION OF NURSERYMEN.
- CONTRACTOR SHALL REPAIR ALL DAMAGE TO PROPERTY FROM PLANTING OPERATIONS AT NO COST TO THE OWNER.
- CONTRACTOR SHALL GUARANTEE NEW PLANT MATERIAL THROUGH ONE CALENDAR YEAR FROM TIME OF PROVISIONAL ACCEPTANCE.
- ALL PROPOSED PLANTS SHALL BE LOCATED CAREFULLY AS SHOWN ON THE PLANS AND THE PLACEMENT SHALL BE APPROVED BY THE LANDSCAPE DESIGNER BEFORE THE INSTALLATION.
- ALL DISTURBED AREAS NOT TO BE PAVED OR PLANTED SHALL BE LOAMED AND SEEDED AS SHOWN. SEE SPECIFICATIONS FOR SOIL PREPARATION AND SEED MIX.
- TWO INCH (2") DEEP, FINELY SHREDDED BARK MULCH WILL BE INSTALLED AROUND ALL TREES AND SHRUBS THAT ARE ISOLATED FROM GROUND COVER AREAS AND GENERAL SHRUB MASSES.
- ALL PLANT MATERIAL SHALL BE INSPECTED BY THE LANDSCAPE DESIGNER ON SITE PRIOR TO INSTALLATION. THE LANDSCAPE DESIGNER WILL TAG ALL TREES AT THE NURSERY AND INSPECT THEM AFTER DELIVERY TO THE SITE. SEE SPECIFICATIONS FOR TAGGING, INSPECTION, AND ACCEPTANCE OF PLANT MATERIAL.
- LANDSCAPE DESIGNER SHALL CONFIRM PLANT LIST AND APPROVE SUBSTITUTIONS OF PLANT VARIETIES PRIOR TO ORDERING OF MATERIAL.
- SOIL MIX: 1/3 PEAT MOSS, 1/3 SCREENED LOAM, 1/3 DEHYDRATED MANURE.
- THE OWNER RESERVES THE RIGHT TO SUBSTITUTE PLANT SELECTIONS WITH PLANTS OF SIMILAR CHARACTERISTICS IF THE SPECIFIED PLANTS ARE NOT AVAILABLE IN ACCEPTABLE QUANTITIES OR CONDITIONS.

GENERAL NOTES

- THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS AND UTILITIES AND REPORT ANY DISCREPANCIES TO THE LANDSCAPE DESIGNER.
- IT IS THE CONTRACTORS RESPONSIBILITY TO VERIFY THE LOCATION OF ALL UTILITIES BY NOTIFYING DIG-SAFE AT 1-800-322-4844 AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION.
- THE CONTRACTOR SHALL CONDUCT PRELIMINARY INVESTIGATIONS INCLUDING ALL NECESSARY EXCAVATION TO DETERMINE IF THE WORK CAN BE DONE AS SHOWN ON THE PLANS. CHANGES MAY BE MADE AS REQUIRED BY FIELD CONDITIONS AND AS DIRECTED BY THE LANDSCAPE DESIGNER.
- ALL EXISTING UTILITIES MAY NOT BE SHOWN ON THE DRAWING. THE CONTRACTOR SHALL ASSUME RESPONSIBILITY FOR DETERMINING THE EXACT LOCATION, SIZE, AND TYPE OF ALL UNDERGROUND UTILITIES AND FOR PROTECTING ALL LINES DURING CONSTRUCTION.
- ALL WORK SHALL COMPLY WITH ALL APPLICABLE STATE AND LOCAL REGULATIONS.

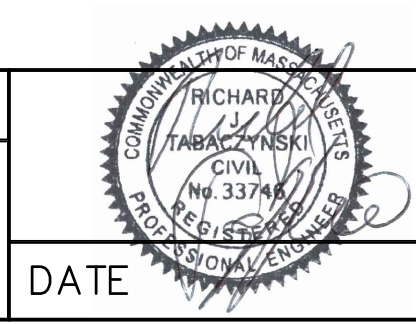

NO.	BY	DATE	REVISION
1	NJC	3-30-22	PER TOWN REVIEW COMMENTS